
LUXMORE

LIGHTING COLLECTION

2026



Light, thoughtfully considered.

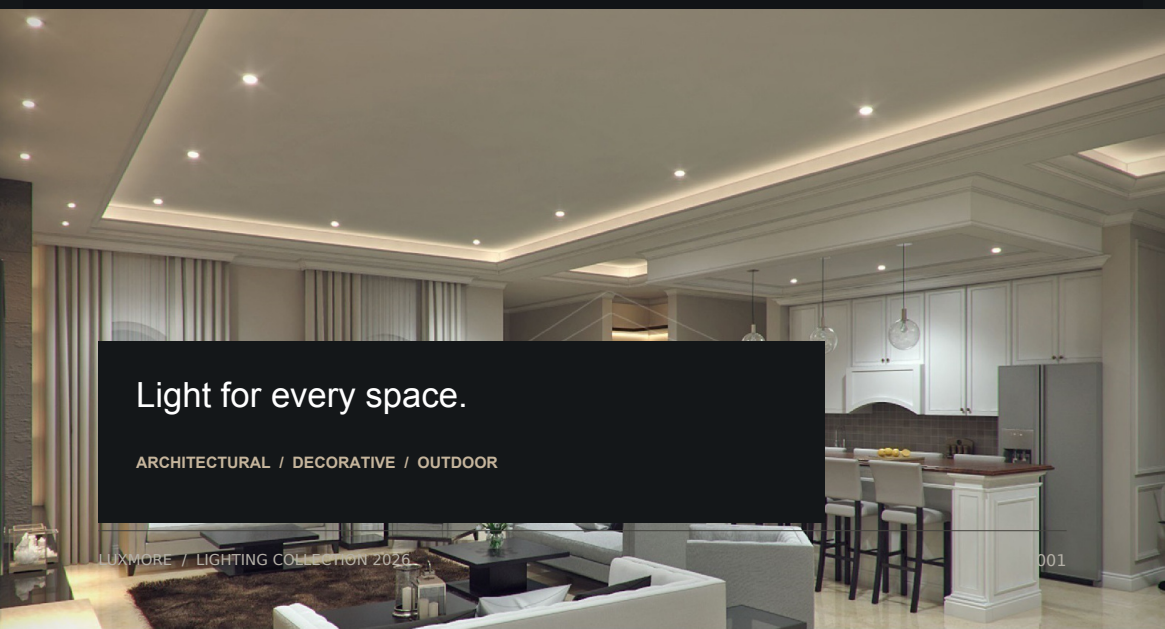

Lighting shapes the way a space looks, feels and works. LUXMORE brings together architectural, decorative and outdoor lighting to balance visual comfort, atmosphere and function.

Our collection supports homes, hospitality, retail, offices, education, industry and landscapes. From a single accent to a coordinated lighting system, the starting point is the character of the space and the needs of its users.

DESIGN. DETAIL. DELIVERY.

Lighting design support includes shop drawings, lux-level calculations, 3D rendering and technical submittals. Bespoke projects can progress through samples and approval before production.

A considered selection of light sources, optics, controls and finishes helps create a coherent scheme - with dedicated support from design through specification.

The collection

Find the right family for your project.

01 Circular magnetic 005

02 Downlights & recessed 022

03 Surface & pendant 060

04 Track & linear 070

05 Panels & highbays 078

06 Strip & Fiber Optic 083

07 Outdoor & landscape 088

08 Linear magnetic 099

09 Model index 107

116 pages / 2026 edition

From concept to specification.

01

Visual comfort

Layer ambient, accent and task lighting. Choose optics and mounting positions to control glare and bring attention to the architecture.

02

Control & colour

Driver, colour-temperature and finish choices vary by model. The options shown on each product sheet are those listed in the reference catalogue.

03

Quality & coordination

LUXMORE works with its manufacturing partners on product quality and project requirements. For bespoke work, sample approval can precede production.

04

Read the specification

Model codes and variant values are retained from the reference. Output values keep the source units; dimensions are in millimetres unless stated otherwise.


Some source sheets repeat a model with different ratings or dimensions. These versions remain separate in this collection. Confirm the selected variant and project options when ordering.

LUXMORE

01


Circular magnetic

DC48V 22 Series. A continuous language of curves, light and modular components.

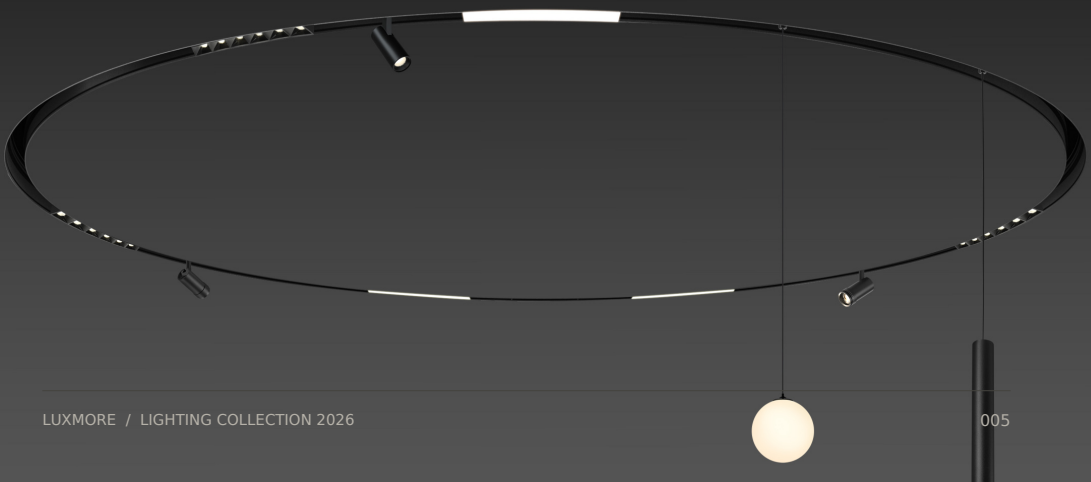

System components

TRACKS, MODULES & SYSTEM DETAILS



ZL80081
P7



ZL80082
P8



ZL80032
P10



ZL0035
P10



ZL80025
P11




ZL80083
P11



ZL80066R
P12




ZL80125R
P12



ZL80026
P13

Recessed integration

TRACKS, MODULES & SYSTEM DETAILS

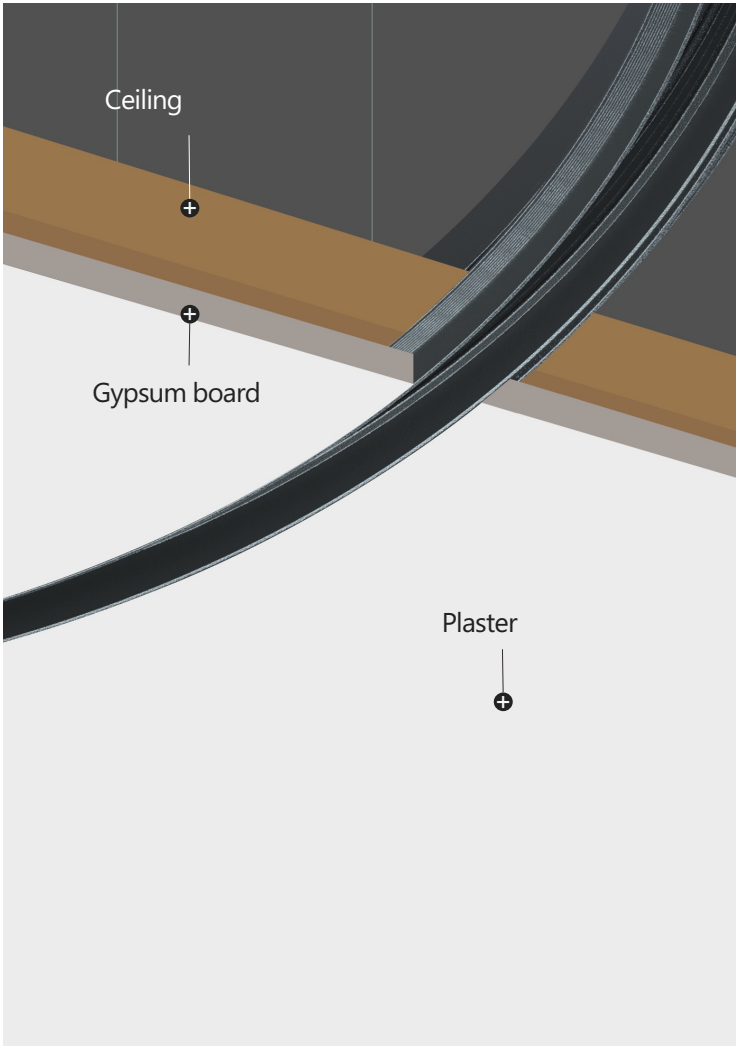


Recessed track rails

TRACKS, MODULES & SYSTEM DETAILS



Size
Ø600*H51.2mm


Black / White





Size
Ø800*H51.2mm


Black / White





Size
Ø1000*H51.2mm


Black / White





Size
Ø1200*H51.2mm


Black / White





Size
Ø1500*H51.2mm

Black / White




Recessed track rails

TRACKS, MODULES & SYSTEM DETAILS



Size
1/2 Circular, Ø600*H51.2mm


Black / White





Size
1/2 Circular, Ø800*H51.2mm


Black / White





Size
1/2 Circular, Ø1000*H51.2mm


Black / White





Size
1/2 Circular, Ø1200*H51.2mm


Black / White





Size
1/2 Circular, Ø1500*H51.2mm

Black / White




Quarter-circle rails & connectors

TRACKS, MODULES & SYSTEM DETAILS



Size
1/4 Circular, Ø600*H51.2mm


Black / White





Size
1/4 Circular, Ø800*H51.2mm


Black / White





Size
1/4 Circular, Ø1000*H51.2mm


Black / White





Size
1/4 Circular, Ø1200*H51.2mm


Black / White





Size
1/4 Circular, Ø1500*H51.2mm

Black / White



Quarter-circle rails & connectors

TRACKS, MODULES & SYSTEM DETAILS




Corner Power Connecter

For Partially Circle (Full Circle no need)

Size

L201*W15.5*H18.5mm

Black / White






Main Power Connecter

For Partially Circle (Full Circle no need)

Size

L75.6*W15.5*H18.5mm

Black / White




Surface track rails

TRACKS, MODULES & SYSTEM DETAILS



Size
Ø600*H51.3mm


Black / White





Size
Ø800*H51.3mm


Black / White





0 Size
Ø1000*H51.3mm


Black / White





Ø1200*H51.3mm


Black / White





Ø1500*H51.3mm

Black / White




Surface track rails

TRACKS, MODULES & SYSTEM DETAILS



1/2 Circular, Ø600*H51.3mm

Black / White






Size

1/2 Circular, Ø800*H51.3mm

Black / White






Size

1/2 Circular, Ø1000*H51.3mm

Black / White






Size

1/2 Circular, Ø1200*H51.3mm

Black / White






Size

1/2 Circular, Ø1500*H51.3mm

Black / White




Surface arcs & connectors

TRACKS, MODULES & SYSTEM DETAILS



Size
1/4 Circular, Ø600*H51.3mm


Black / White





Size
1/4 Circular, Ø800*H51.3mm


Black / White





Size
1/4 Circular, Ø1000*H51.3mm


Black / White





Size
1/4 Circular, Ø1200*H51.3mm


Black / White





Size
1/4 Circular, Ø1500*H51.3mm

Black / White



Surface arcs & connectors

TRACKS, MODULES & SYSTEM DETAILS




Corner Power Connecter

For Partially Circle (Full Circle no need)

Size

L201*W15.5*H18.5mm

Black / White






Main Power Connecter

For Partially Circle (Full Circle no need)

Size


L75.6*W15.5*H18.5mm

Black / White



ZL80081 - diffuse module


TRACKS, MODULES & SYSTEM DETAILS

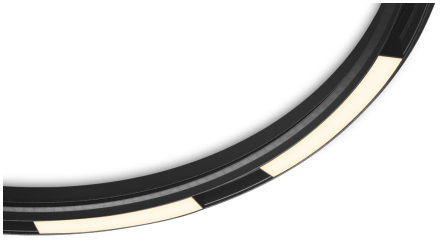

6W 48V


-6W-D600

POWER: 6W
CRI: 90
LUMEN:346Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L188*H45mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




1-6W-D1200

POWER: 6W
CRI: 90
LUMEN:387Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L190*H45mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




-6W-D800

POWER: 6W
CRI: 90
LUMEN:360Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L168*H45mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




-6W-D1500

POWER: 6W
CRI: 90
LUMEN:397Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:176*H45mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



6W-D1000


POWER: 6W
CRI: 90
LUMEN:377Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L177*H45mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS

ON/OFF DIM 0-10V DALI ZigBee

COLOR FINISHINGS



Black White


ZL80081 - diffuse module

TRACKS, MODULES & SYSTEM DETAILS


2ALGD2280081-6W-D600

ANGLE 110° 1-6W-D800

6W 110° 3000K




6W 110° 3000K




ANGLE 110° 081-6W-D1000

6W 110° 3000K




6W 110° 3000K




ANGLE 110° 81-6W-D1200

6W 110° 3000K




6W 110° 3000K




ANGLE 110° 1-6W-D1500

6W 110° 3000K




6W 110° 3000K




ANGLE 110°

6W 110° 3000K



6W 110° 3000K



ZL80082 - grating module


TRACKS, MODULES & SYSTEM DETAILS



6W 48V


2-6W-D600

POWER: 6W
CRI: 90
LUMEN:530Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L188*H45mm
BEAM ANGLE: 24°
FINISHED COLOR: Black/White




-6W-D800

POWER: 6W
CRI: 90
LUMEN:550Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L168*H45mm
BEAM ANGLE: 24°
FINISHED COLOR: Black/White




6W-D1000

POWER: 6W
CRI: 90
LUMEN:532Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L177*H45mm
BEAM ANGLE: 24°
FINISHED COLOR: Black/White




-6W-D1200

POWER: 6W
CRI: 90
LUMEN:544Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:L190*H45mm
BEAM ANGLE: 24°
FINISHED COLOR: Black/White



-6W-D1500

POWER: 6W
CRI: 90
LUMEN:550Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:176*H45mm
BEAM ANGLE: 24°
FINISHED COLOR: Black/White



RECOMMEND

ON/OFF

OTHER VERSIONS

DIM 0-10V DALI ZigBee

COLOR FINISHINGS



Black



White

ZL80082 - grating module

TRACKS, MODULES & SYSTEM DETAILS

-6W-D600

ANGLE 24° -6W-D800


ANGLE 24° 2-6W-D1000

ANGLE 24° -6W-D1200


ANGLE 24° 082-6W-D1500

ANGLE 24°


6W 24° 3000K




6W 24° 3000K




6W 24° 3000K




6W 24° 3000K




6W 24° 3000K




6W 24° 3000K




6W 24° 3000K




6W 24° 3000K



6W 24° 3000K



6W 24° 3000K



Adjustable circular modules


TRACKS, MODULES & SYSTEM DETAILS



8W 48V

-8W-D600/D800/D1000/D1200/D1500

POWER: 8W
CRI: 90
LUMEN:620Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:Ø34.5*L85mm
BEAM ANGLE: 24°/40°/60°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS


ON/OFF DIM 0-10V DALI ZigBee

COLOR FINISHINGS




Black White

280032-8W




OTHER VERSIONS

8W 40° 3000K



8W 40° 3000K



Adjustable circular modules

TRACKS, MODULES & SYSTEM DETAILS






ANGLE 10-60°

10W 48V

-10W-D600/D800/D1000/D1200/D1500

POWER: 10W
CRI: 90
LUMEN:739Lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION:Ø47*L105mm
BEAM ANGLE: 10-60°
FINISHED COLOR: Black/White



COLOR FINISHINGS



Black White


RECOMMEND OTHER VERSIONS

ON/OFF DIM 0-10V DALI ZigBee


2280035-10W

ANGLE 10-60°

10W 10° 3000K



10W 10° 3000K



LUXMORE

02

Downlights & recessed


Precision, comfort and choice. Recessed luminaires, adjustable optics and multi-head formats.



Tevin

ZL1919 / ZL1920



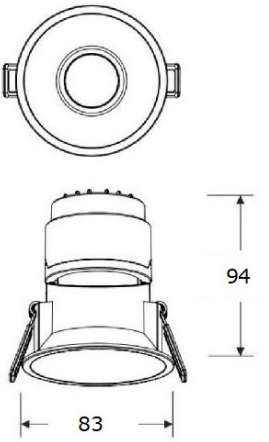

Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL1919	D: 83 H:94	12W	100 lm/W	15/24/36°	IP 44
ZL1920	D: 105 H:135	18W	100 lm/W	15/24/36°	IP 44


OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Hazel

IL 19125 / IL 1926

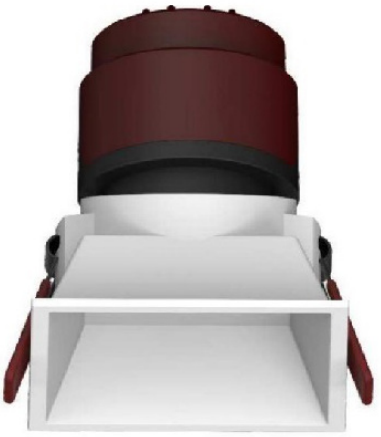

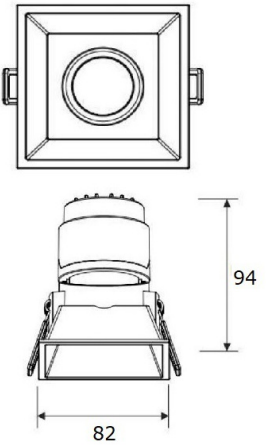

Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 19125	Ø:82 H:94	7W	90/W	IP 20
IL 1926	Ø:82 H:109	12W	90/W	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Tevin

ZL1010 / ZL1012






Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL1010	D72 X H60	10W	100 lm/W	15/24/36°	IP 20/65
ZL1012	D72 X H60	12W	100 lm/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Hazel

ZL2012





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL2012	120x120x110	12W	100 lm/W	15/24/36 °	IP 44

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Tevin

ZL 1010 / ZL 1020 / ZL 1030





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 1010	ø:84H:100	10W	100 lm/W	15/24/36°	IP 20/44
ZL 1020	ø:84H:100	20W	100 lm/W	15/24/36°	IP 20/44
ZL 1030	Ø:110H:130	30W	100 lm/W	15/24/36°	IP 20/44

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

Hazel


IL 1916 / IL 1917



IL 1916



IL 1917



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1916	Ø:68 H:80	7W	90/W	15/23/38 °	IP 20
IL 1917	Ø:84 H:105	12W	90/W	15/23/38 °	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

Dulux

ZL1992







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL1992	Ø:55 H:86	10W	100 lm/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Tevin

ZL 1919





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
ZL 1919	Ø:60 H: 75	10W	90/W	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Verna

ZL 9008 / ZL 9010







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 9008	Ø:72 H: 38	8W	100 lm/W	15/24/36 °	IP20/54
ZL 9010	Ø:82 H: 38	10W	100 lm/W	15/24/36 °	IP20/54

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Tevin

ZL 1010 / ZL 1020







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 1010	Ø:90 H:95	10W	110 lm/W	15/24/36 °	IP 20/44
ZL 1020	Ø:120 H:115	20W	110 lm/W	15/24/36 °	IP 20/44

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.


Tevin

ZL 1010 / ZL 1020 / ZL 1030









Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 1010	Ø:82 X 100	10W	110 lm/W	15/24/36 °	IP 20/44
ZL 1020	Ø:98 X 129	20W	110 lm/W	15/24/36 °	IP 20/44
ZL 1030	Ø:124 x 129	30W	110 lm/W	15/24/36 °	IP 20/44

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.


Lotus

IL 1410









Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1410	90 x 90	9.5W	90/W	15/24/36 °	IP 20 / IP65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White


* Output values retain the units printed in the reference.

Tevin

ZL 2015 / ZL 2020





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 2015	73X73X115	10W	110 lm/W	15/24/36 °	IP 20/44
ZL 2015	73X73X115	15W	110 lm/W	15/24/36 °	IP 20/44
ZL 2020	98X98X131	20W	110 lm/W	15/24/36 °	IP 20/44


OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

Hazel


IL 1919 / IL 1920



IL 1919



IL 1920





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 1919	W:68 H:79	7W	90/W	IP 20
IL 1920	W:88 H:105	12W	90/W	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Lotus

ZL 2010 / ZL 2015 / ZL 2020







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL 2010	66X66X110	10W	100 lm/W	15/24/36°	IP 20/44
ZL 2015	77X77X116	15W	100 lm/W	15/24/36°	IP 20/44
ZL 2020	90X90X129	20W	100 lm/W	15/24/36°	IP 20/44


OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Vectra

IL 2300 / IL 2302 / IL-2300/2302-A / IL-2300/2302-B / IL-2300/2302-C / IL-2300/2302-D / IL-2300/2302-E / IL-2300/2302-F

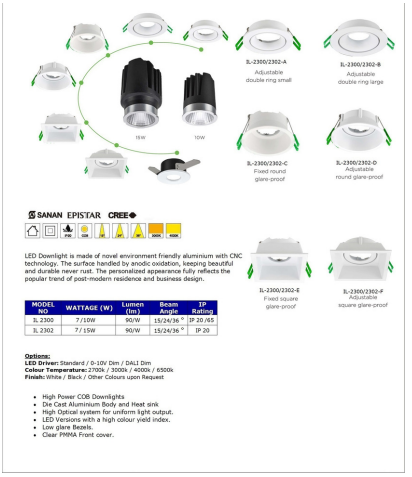



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 2300	7/10W	90/W	15/24/36 °	IP 20 /65
IL 2302	7/ 15W	90/W	15/24/36 °	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Luchi

IL 2310





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2310	194x104x109	2x10W	90/W	15/24/36 °	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

25i


ZL2310





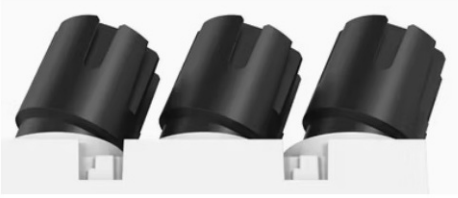





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL2310	160X55X94	3X10W	100 lm/W	15/24/36 °	IP 20/65


OPTIONS & DETAILS

finish. Light is provided from a single point COB high performing LED with a
Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White

* Output values retain the units printed in the reference.

25i

IL 924i / IL 925i

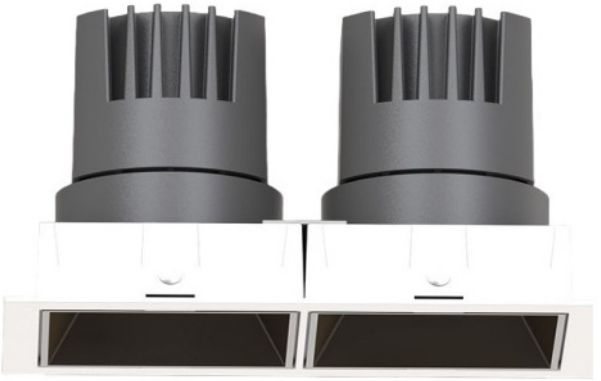



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 924i	225 X 115	2x25W	90 lm/W	36 °	IP 20
IL 925i	225 X 115	2x30W	90 lm/W	36 °	IP 20


OPTIONS & DETAILS

finish. Light is provided from a single point COB high performing LED with a
Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White

* Output values retain the units printed in the reference.

25i

IL 922i / IL 9225

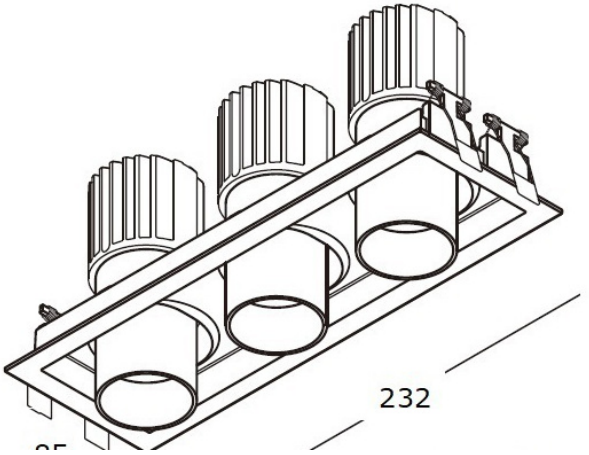



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 922i	155 X 85 X 116	2x10W	110/W	36 °	IP 20
IL 9225	232 X 85 X 116	3 X 15W	110/W	36 °	IP 20

OPTIONS & DETAILS

finish. Light is provided from a single point COB high performing LED with a
Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White


* Output values retain the units printed in the reference.

Hazel


IL 1916 / IL 1917



IL 1916



IL 1917



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1916	Ø:68 H:80	7W	90/W	15/23/38 °	IP 20
IL 1917	Ø:84 H:105	12W	90/W	15/23/38 °	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Luchi

IL 2310





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2310	208x100x135	2X20W	90/W	15/24/36 °	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Tevin

ZL1998





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL1998	160x55x94	3X8W	100 lm/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Point

IL 2282 / IL 2283 / IL 2284



IL 2282



IL 2283



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 2282	3W	80/W	15/24/36 °	IP 20
IL 2283	1W	80/W	15/24/36 °	IP 20
IL 2284	3W	80/W	15/24/36 °	IP 20

OPTIONS & DETAILS

Driver: Standard.
CCT: 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request


* Output values retain the units printed in the reference.

Tevin

IL 1210 / IL 1212







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1210	Ø95 H69	7W	90/W	15/24/36°	IP20 / IP65
IL 1212	Ø95 H90	12W	90/W	15/24/36°	IP20 / IP65

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White

* Output values retain the units printed in the reference.

Rinz

IL 1001 / IL 1002 / IL 1003





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1001	Ø:90 H:80	7W /12W	90/W	15/24/36°	IP 20
IL 1002	ø:125 H:100	18W	90/W	15/24/36°	IP 20
IL 1003	Ø:165 H: 138	30/35W	80/W	15/24/36°	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Scherzo


IL 2278 / IL 2279



IL 2278



IL 2279



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2278	90x50	8W	90/W	15/24/36 °	IP 20/65
IL 2279	90x50	8W	90/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Loralai

IL 1099





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	IP
IL 1099	6W	90/W	IP 65


OPTIONS & DETAILS

CCT: 3000K / 6500K
Finish: White /Chrome

* Output values retain the units printed in the reference.

Pull Out Light

IL 1060 / IL 1061 / IL 1062 / IL 1063







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1060	Ø85 H101.5	7W	90/W	15/24/36°	IP20
IL 1061	Ø102 H119	12W	90/W	15/24/36°	IP20
IL 1062	85x85 H101.5	7W	90/W	15/24/36°	IP20
IL 1063	102x102 H119	12W	90/W	15/24/36°	IP20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Neo 25i

IL 2525



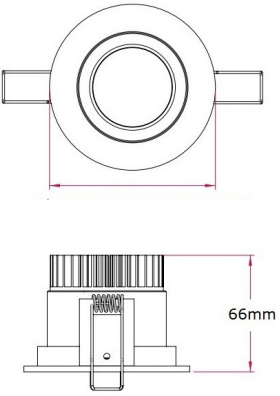

Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2525	Ø:170 H:66	25W	80/W	36 °	IP 20

OPTIONS & DETAILS


finish. Light is provided from a single point COB high performing LED with a
Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Hazel

ZL 6030





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
ZL 6030	142 X 142X153	30W	100/W	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Luchi

IL 2310





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2310	125 x 65 x 52	2 x 7W	90/W	15/23/38 °	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Luchi

ZL2020 / ZL2024





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL2020	175 X 56	20W	100 lm/W	15/24/36°	IP 20/65
ZL2024	175 X 56	24W	100 lm/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

Scherzo

ZL8020 / ZL8024







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL8020	130 X 68	20W	100 lm/W	15/24/36 °	IP 20/65
ZL8024	130 X 68	24W	100 lm/W	15/24/36 °	IP 20/65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Hazel

ZL1020 / ZL1025 / ZL1030





Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL1020	102 X 78	20W	100 lm/W	15/24/36 °	IP 20/65
ZL1025	102 x 78	25W	100 lm/W	15/24/36°	IP 20/65
ZL1030	102 X 78	30W	100 lm/W	15/24/36°	IP 20/65


OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Hazel

ZL 6020 / ZL 6030

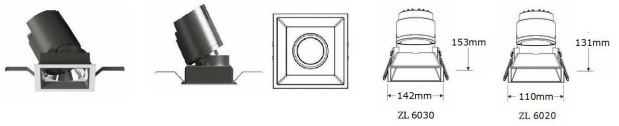



Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
ZL 6020	110 X110X131	20W	100/W	IP 20
ZL 6030	142 X 142X153	30W	100/W	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 3500K / 4000K /6500K
Finish: White / Black


* Output values retain the units printed in the reference.

25i

IL 922i / IL 923i / IL 924i / IL 925i







Downlights & recessed collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 922i	185 x 185	25W	90 lm/W	36 °	IP 20
IL 923i	185 x 185	30W	90 lm/W	36 °	IP 20
IL 924i	335 x 185	2x25W	90 lm/W	36 °	IP 20
IL 925i	335 x 185	2x30W	90 lm/W	36 °	IP 20

OPTIONS & DETAILS

finish. Light is provided from a single point COB high performing LED with a
Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 3000K / 4000K / 6500K
Finish: White

* Output values retain the units printed in the reference.

LUXMORE

03

Surface & pendant

Light as an object. Clean cylinders, refined pendants and versatile surface-mounted forms.



Belano

ZL 9010





Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
ZL 9010	D50 H100	8W/10W	90/W	IP 20/65

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: Black / White


* Output values retain the units printed in the reference.


Belano

IL 5012









Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 5012	60 x 175.5	15W	90/W	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: Black / White


* Output values retain the units printed in the reference.


Belano

IL 5012 / IL 5013 / IL 5014











Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 5012	Ø:55 H:134	7W	90/W	IP 20
IL 5013	Ø:55 H:178	12W	90/W	IP 20
IL 5014	Ø:75 H:180	30W	90/W	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: Black / White

* Output values retain the units printed in the reference.

Belano

IL 1881





Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	IP
IL 1881	2X25W	110/W	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: Black / White


* Output values retain the units printed in the reference.

Scherzo

ZL 2322







Surface-mounted LED with opal diffuser and a pre-treated CRCA mild-steel housing. White with black finish.

Model	Power	Size (mm)	CCT	Mounting
ZL 2322	20W	Ø400 H100	3000K	Surface

OPTIONS & DETAILS

Finish: White With Black
Housing Material: Pre-treated CRCA mild steel
Reflector/ Diffuser: Opal Diffuser
Wiring: Internal wiring - PVC insulated single
Mounting Options: Surface Mounted
CCT: 3000K Warm White


* Output values retain the units printed in the reference.

Lumiz

IL 4025





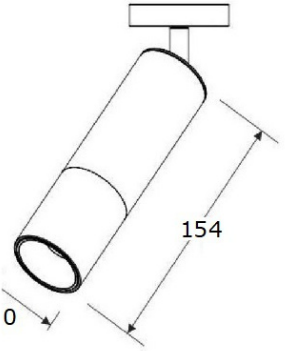

Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 4025	Ø:70 H:154	25W	90/W	15/24/36°	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: Black / White

* Output values retain the units printed in the reference.

Remo

IL 1042









Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 1042	D:75 H:280	12W / 24W	90/W	IP20 / IP54

OPTIONS & DETAILS

Driver: Standard
CCT: 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Cane

IL 1066 / IL 1068



1066 – 8-10W

1068 – 12W



Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 1066	8/10W	90/W	15/24/36 °	IP 20
IL 1068	12W	90/W	15/24/36 °	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Vesanto

IL 2286 / IL 2287 / IL 2288 / IL 2289 / IL 2290



Surface & pendant collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 2286	Ø:175	15W	80/W	IP 44
IL 2287	Ø:225	18W	80/W	IP 44
IL 2288	Ø:300	30W	80/W	IP 44

Model	Size / mm	Power	Output*	IP
IL 2289	175 X 175	15W	80/W	IP 44
IL 2290	225 X 225	18W	80/W	IP 44

* Output values retain the units printed in the reference.

LUXMORE

04

Track & linear

Flexible light for changing spaces. Directional track fittings, linear profiles and compact arrays.



Tiaggo

IL 4125





Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 4125	Ø:71 H::127	25W	90/W	15 - 60.°	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Glady

IL 4025 / IL 4030





Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 4025	Ø:60 H:140	25W	90/W	15/24/36°	IP 20
IL 4030	Ø:80 H:160	30W	90/W	15/24/36°	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black


* Output values retain the units printed in the reference.

Alloye

1005








Single-circuit track in three lengths. Aluminium and plastic construction with through-wiring and feed options.


Model	Length	Material	Finish
1005	1.0 m	Aluminium / plastic	Black / white
1005	2.0 m	Aluminium / plastic	Black / white
1005	3.0 m	Aluminium / plastic	Black / white

* Output values retain the units printed in the reference.

Blade

IL 1080 / IL 1081 / IL 1082 / IL 1083

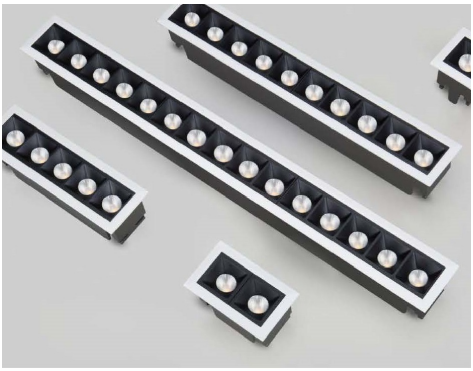

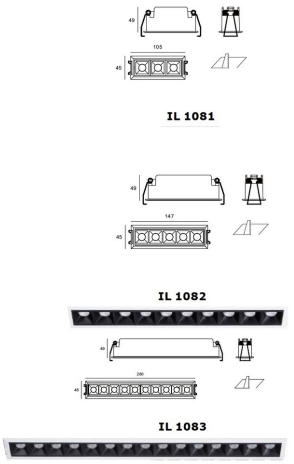

Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 1080	6W	90/W	15/30/45°	IP 20
IL 1081	10W	90/W	15/30/45°	IP 20
IL 1082	20W	90/W	15/30/45°	IP 20
IL 1083	30W	90/W	15/30/45°	IP 20


OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White with Inner Black

* Output values retain the units printed in the reference.

Dolce

IL 2272-A / IL 2272-B / IL 2272-C

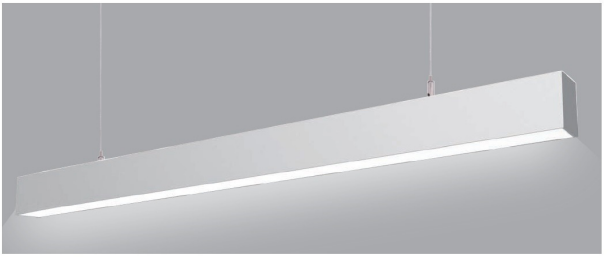

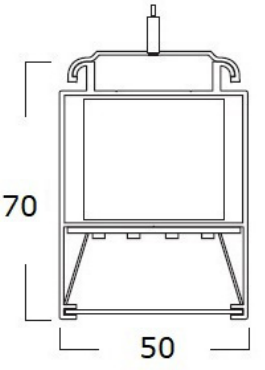

Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2272-A	1000x50x70	30/40W	110/W	120 °	IP 20
IL 2272-B	2000x50x70	80W	110/W	120 °	IP 20
IL 2272-C	2000x50x70	100W	110/W	120 °	IP 20


OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Sleek

IL 2272-A / IL 2272-B

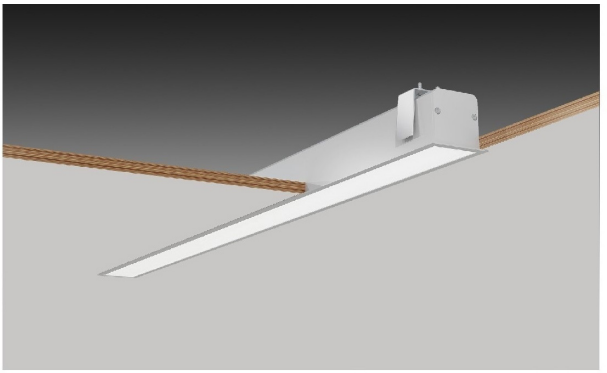



Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2272-A	1000x50x 40	30/40W	110/W	120 °	IP 20
IL 2272-B	2000x50x 40	80W	110/W	120 °	IP 20


OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim
CCT: 3000K / 4000K / 6500K
Finish: White / Black / Other Colours upon Request

* Output values retain the units printed in the reference.

Blade

ZL9010 / ZL9020 / ZL9030

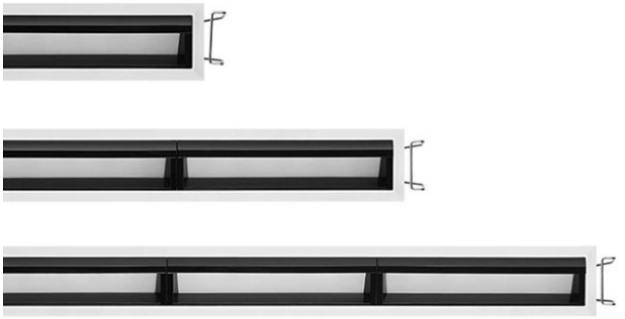



Track & linear collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
ZL9010	147x 47x 57	10W	100 lm/W	15/24/36	IP 20
ZL9020	280X47X57	20W	100 lm/W	15/24/36	IP 20
ZL9030	414X47X57	30W	100 lm/W	15/24/36	IP 20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White with Inner Black

* Output values retain the units printed in the reference.

LUXMORE

05

Panels & highbays

Efficient illumination at every scale, from workplaces and commercial interiors to demanding industrial spaces.




Riyo

IL 1070 / IL 1071





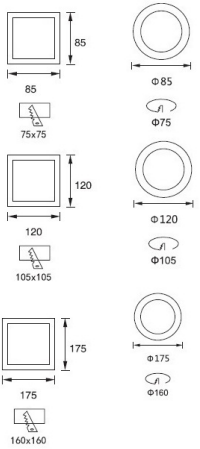

Panels & highbays collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 1070	3/7/15/18/30W	90/W	120°	IP 20
IL 1071	3/7/15/18/30W	90/W	120°	IP 20


OPTIONS & DETAILS


Driver: Standard
CCT: 2700K / 3000K / 4000K / 6500K
Finish: White

* Output values retain the units printed in the reference.

Matrix

IL 2268 / IL 2269

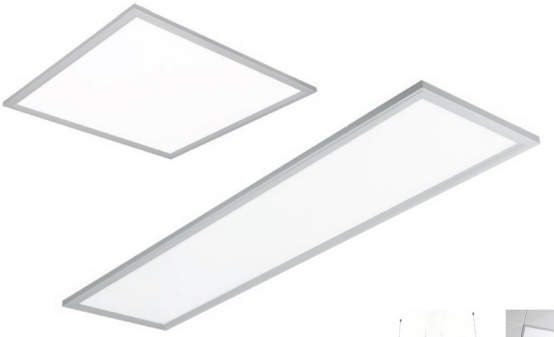









Panels & highbays collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2268	60 x 60	40W	85/W	120°	IP20
IL 2269	30 x 120	40W	85/W	120°	IP20

OPTIONS & DETAILS

Driver: Standard / 0-10V Dim / DALI Dim

CCT: 3000K / 4000K / 6500K

Finish: White.


Source table: 60 x 60 / 30 x 120. Source drawings: 600 x 600 / 300 x 1200 mm. Confirm dimensions before specifying.


* Output values retain the units printed in the reference.

Relca

IL 2251 / IL 2252







Panels & highbays collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 2251	1215X87X70	40 W	85/W	120 °	IP 65
IL 2252	610X87X70	24 W	85/W	120 °	IP 65

OPTIONS & DETAILS

Driver: Integrated LED Driver/Lamps
CCT: 3000K / 4000K / 6500K
Finish: Grey (Aluminium + PCB)

* Output values retain the units printed in the reference.

Aria

IL 22150 / IL 22200





Panels & highbays collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 22150	360 x 184	150W	100 lm/W	120 °	IP 65
IL 22200	360 x 190	200W	100 lm/W	120 °	IP 65

OPTIONS & DETAILS

Driver: Integrated LED Driver.
CCT: 3000K / 4000K /5000K/ 6500K
Finish: Black

* Output values retain the units printed in the reference.


LUXMORE


06


Strip &
Fiber Optic

Continuous lines and points of light. Flexible systems for architectural details and immersive interiors.



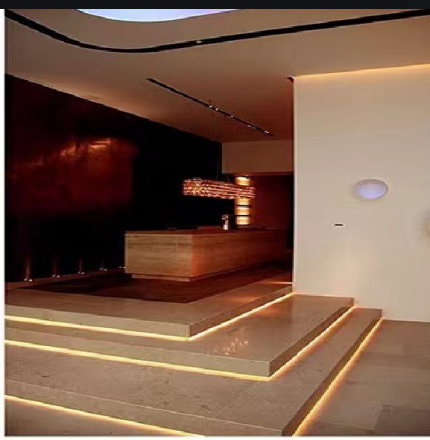


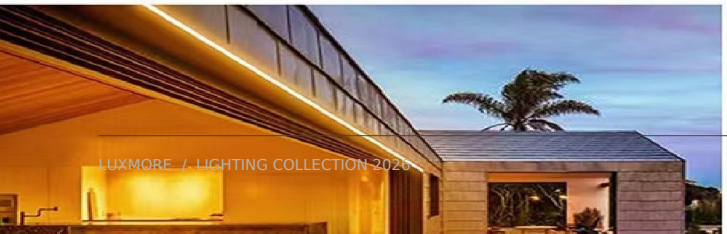




Lumiz Series

IL 1006 / IL 1007 / IL 1006.A

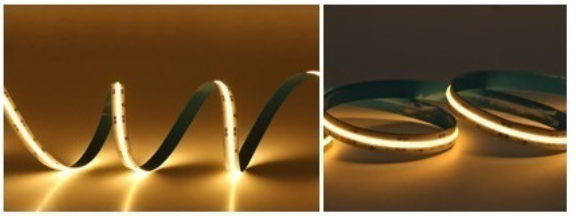



Strip & Fiber Optic collection. Refer to the table for the individual model configurations and ratings.

Model	Power / m	Voltage	Output*	Beam	IP
IL 1006	9.6W / Mtr	12V / 24V	950 lm/W	120 °	IP 20
IL 1007	10W / Mtr	12V / 24V	1100 lm/W	120 °	IP 20
IL 1006.A	14.4W/ Mtr	12V / 24V	1350 lm/W	120 °	IP 20


OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K / RGB
Finish: White PCB

* Output values retain the units printed in the reference.

Lumiz Series

IL 1006 / IL 1007 / IL 1006.A

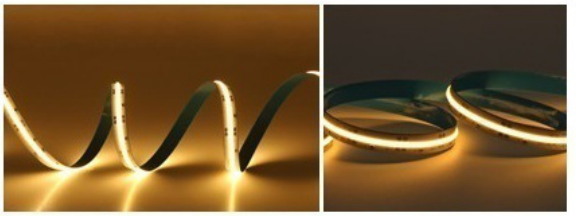



Strip & Fiber Optic collection. Refer to the table for the individual model configurations and ratings.

Model	Power / m	Voltage	Output*	Beam	IP
IL 1006	9.6W / Mtr	12V / 24V	950 lm/W	120 °	IP 20
IL 1007	10W / Mtr	12V / 24V	1100 lm/W	120 °	IP 20
IL 1006.A	14.4W/ Mtr	12V / 24V	1350 lm/W	120 °	IP 20

OPTIONS & DETAILS


Driver: Standard / 0-10V Dim / DALI Dim / TRIAC Dim
CCT: 2700K / 3000K / 4000K / 6500K / RGB
Finish: White PCB


* Output values retain the units printed in the reference.

Rio

Twin-wheel RGB



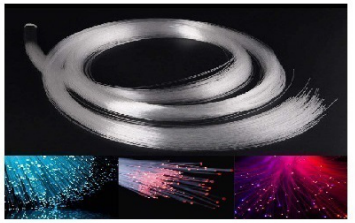



40W twin-wheel RGB fiber-optic projector. Adjustable speed, cooling fan and optional remote control; for indoor dry locations.

Light engine	Power	Control	Fiber head
Twin-wheel RGB	40W	DMX512 / non-DMX	Ø30 mm

OPTIONS & DETAILS

DMX : DMX 512 / Without DMX


CCT: Cool White / Warm White / Day Light / RGB

* Output values retain the units printed in the reference.

Rio

IL 75 / IL 100 / IL 150 / IL 200 / IL 250 / IL 300



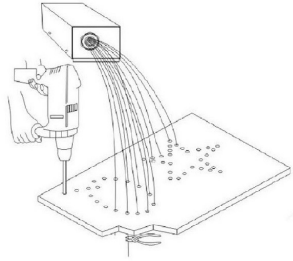

Flexible, clear end-lit fibers for star ceilings and decorative effects. Six diameters are listed.

Model	Diameter / mm	Colour
IL 75	Ø0.75	Clear
IL 100	Ø1.00	Clear
IL 150	Ø1.50	Clear
IL 200	Ø2.00	Clear
IL 250	Ø2.50	Clear
IL 300	Ø3.00	Clear

* Output values retain the units printed in the reference.

LUXMORE

07

Outdoor & landscape

Extend the architecture after dark. Inground, step, wall, bulkhead and floodlighting families.



Jaaz

IL 1031 / IL 1032 / IL 1033 / IL 1034



IL 1031 – 12W



IL 1032 – 12W

IL 1033 – 6W



IL 1034 – 6W



Round and rectangular bulkheads for wall or ceiling mounting, with aluminium construction and polycarbonate covers.

Model	Power	Form
IL 1031	12W	Round
IL 1032	12W	Round / shielded
IL 1033	6W	Rectangular
IL 1034	6W	Square

* Output values retain the units printed in the reference.

Jaaz


IL 1031 / IL 1032 / IL 1033 / IL 1034


IL 1031 12W


IL 1032 – 12W


IL 1033 – 6W


IL 1034 – 6W

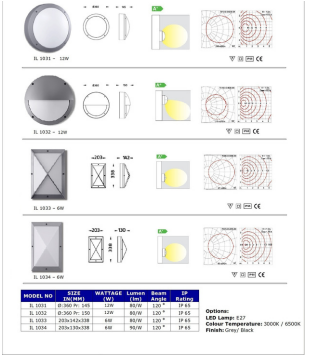

Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1031	Ø:360 Pr: 145	12W	80/W	120 °	IP 65
IL 1032	Ø:360 Pr: 150	12W	80/W	120 °	IP 65
IL 1033	203x142x338	6W	80/W	120 °	IP 65
IL 1034	203x130x338	6W	90/W	120 °	IP 65

OPTIONS & DETAILS

CCT: 3000K / 6500K
Finish: Grey/ Black

* Output values retain the units printed in the reference.

Aria

IL 1023 / IL 1024 / IL 1025 / IL 1026



IL 1023 – 3W

IL 1024 – 7W (GU10)

IL 1026 – 9W

IL 1025 – 3W



Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1023	42 x 93	3W	80/W	120 °	IP 67
IL 1024	100 x 100	7W (GU10)	80/W	120 °	IP 67
IL 1025	130 x 75	3W	80/W	120 °	IP 67
IL 1026	145 x 150	9W	80/W	120 °	IP 67

OPTIONS & DETAILS

Driver: Standard

CCT: 3000K

Finish: Stainless Steel

* Output values retain the units printed in the reference.

Aria

IL 1012







Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1012	180 x 90	18W	90 lm/W	120 °	IP 67

OPTIONS & DETAILS

Driver: Standard
CCT: 3000K
Finish: Stainless Steel

* Output values retain the units printed in the reference.

Aria

IL 1027 / IL 1028 / IL 1029 / IL 1030




IL 1027 1W



IL 1028 – 1W



IL 1029 – 1W



IL 1030 – 6W

Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 1027	Ø110 H160	1W	80/W	IP65
IL 1028	Ø110 H160	1W	80/W	IP65
IL 1029	Ø110 H160	1W	80/W	IP65
IL 1030	Ø116 H150	6W	90/W	IP65

OPTIONS & DETAILS


Driver: Standard
CCT: 3000K
Finish: Stainless Steel / Big size in Black

* Output values retain the units printed in the reference.

Aric

IL 4122



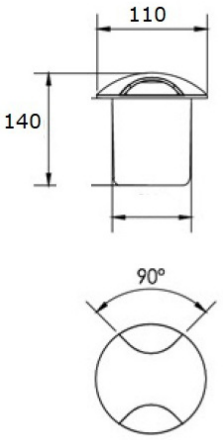

Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	IP
IL 4122	D:110 H:140	5W/7W/8W	85/W	IP 67

OPTIONS & DETAILS

Driver: Standard
CCT: 3000K
Finish: Stainless Steel


* Output values retain the units printed in the reference.

Reya

IL 1019 / IL 1020 / IL 1021 / IL 1022











Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1019	79x32x44	3W	80/W	120 °	IP 65
IL 1020	196x82x44	5W	80/W	120 °	IP 65
IL 1021	185x140x90	2x6W	80/W	120 °	IP 65
IL 1022	79x32x40	2x5W	80/W	120 °	IP 65

OPTIONS & DETAILS

Driver: Standard

CCT: 3000K / 6500K

Finish: White / Black / Grey


The source image labels and table give different wattages for IL 1021 / IL 1022. Table values are reproduced here; confirm the selected variant.

* Output values retain the units printed in the reference.

Aria

IL 1019A





Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1019A	180x85	6W	80/W	120 °	IP 65

OPTIONS & DETAILS

Driver: Standard
CCT: 3000K / 6500K
Finish: White / Black

* Output values retain the units printed in the reference.

Threz

IL 1014 / IL 1015 / IL 1016 / IL 1017 / IL 1018



IL 1014 – 2x5W



IL 1015 – 5W



IL 1016 – 2X10W



IL 1017 · 2x5W



IL 1018 – 5W



Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Size / mm	Power	Output*	Beam	IP
IL 1014	100x200x124	2x5W	90/W	83°	IP65
IL 1015	56x100x80	5W	90/W	83°	IP65
IL 1016	65x65x170	2x10W	90/W	83°	IP65
IL 1017	62x145x82	2x5W	90/W	83°	IP65
IL 1018	62x95x82	5W	90/W	83°	IP65

OPTIONS & DETAILS

Driver: Standard

CCT: 3000K

Finish: White / Black / Grey

* Output values retain the units printed in the reference.

Limo Series

IL 9020 / IL 9050 / IL 9100 / IL 9150





Outdoor & landscape collection. Refer to the table for the individual model configurations and ratings.

Model	Power	Output*	Beam	IP
IL 9020	20W	110lm/W	120 °	IP 66
IL 9050	50W	110lm/W	120 °	IP 66
IL 9100	100W	110lm/W	120 °	IP 66
IL 9150	150W	110lm/W	120 °	IP 66

OPTIONS & DETAILS

Driver: Standard
CCT: 3000K / 6500K
Finish: Black / Grey

* Output values retain the units printed in the reference.

LUXMORE

08


Linear magnetic

DC48V modular track. Floodlight and adjustable grating modules, with four installation formats.



Magnetic gate lamp


22 SERIES

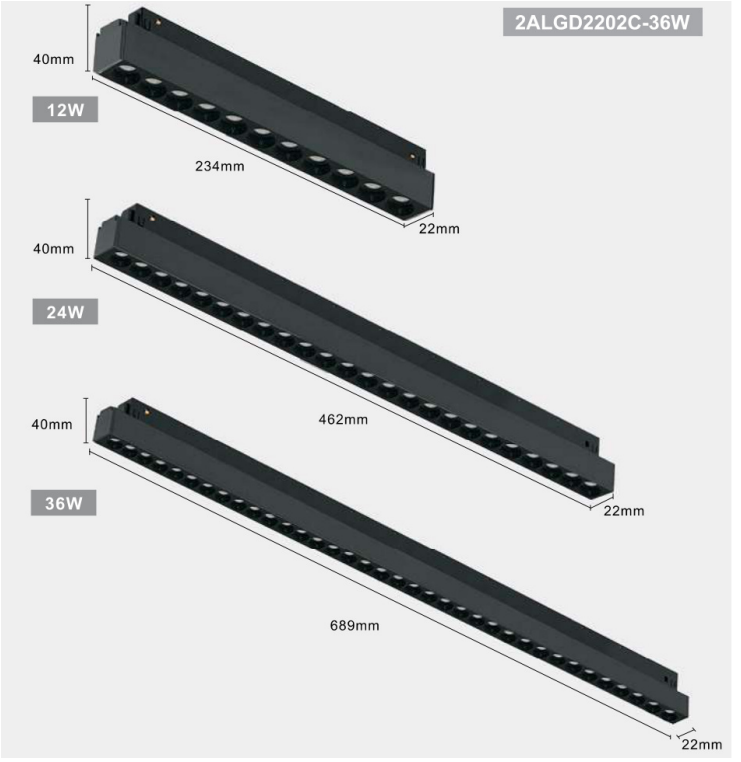

Model	Power	L x W x H / mm	Beam
2ALGD2202C-12W	12W	234 x 22 x 40	Approx. 110°
2ALGD2202C-24W	24W	462 x 22 x 40	Approx. 110°
2ALGD2202C-36W	36W	689 x 22 x 40	Approx. 110°


Adjustable grating lamp

22 SERIES

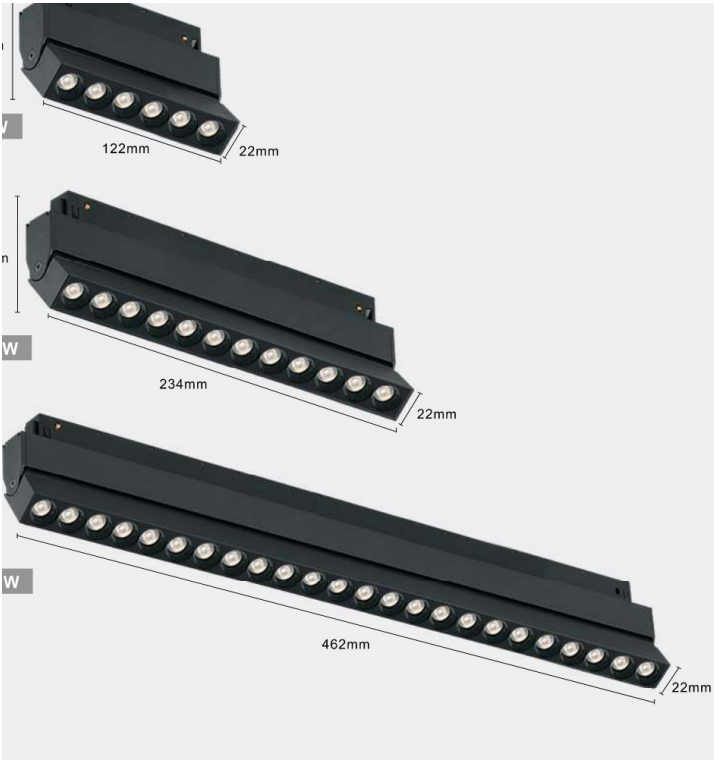


Model	Power	L x W x H / mm	Beam
2ALGD2203N-6W	6W	122 x 22 x 76	15° / 24° / 36°
2ALGD2203N-12W	12W	234 x 22 x 76	15° / 24° / 36°
2ALGD2203N-24W	24W	462 x 22 x 76	15° / 24° / 36°

The track platform

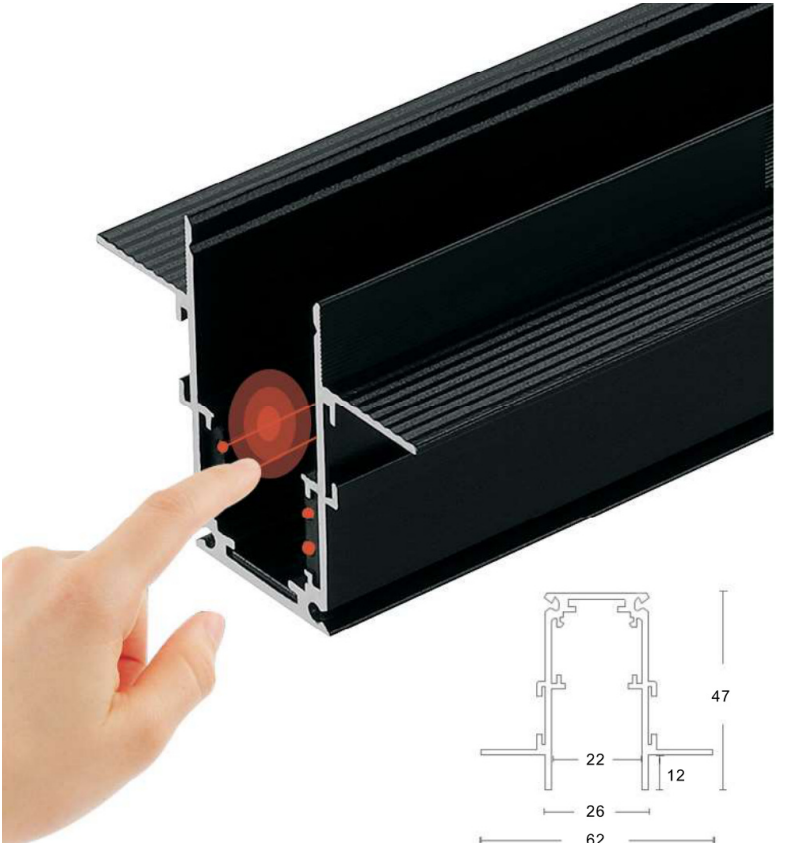


The source system is specified as DC48V. Coordinate the track, power supply and selected modules as one system.

Connection details

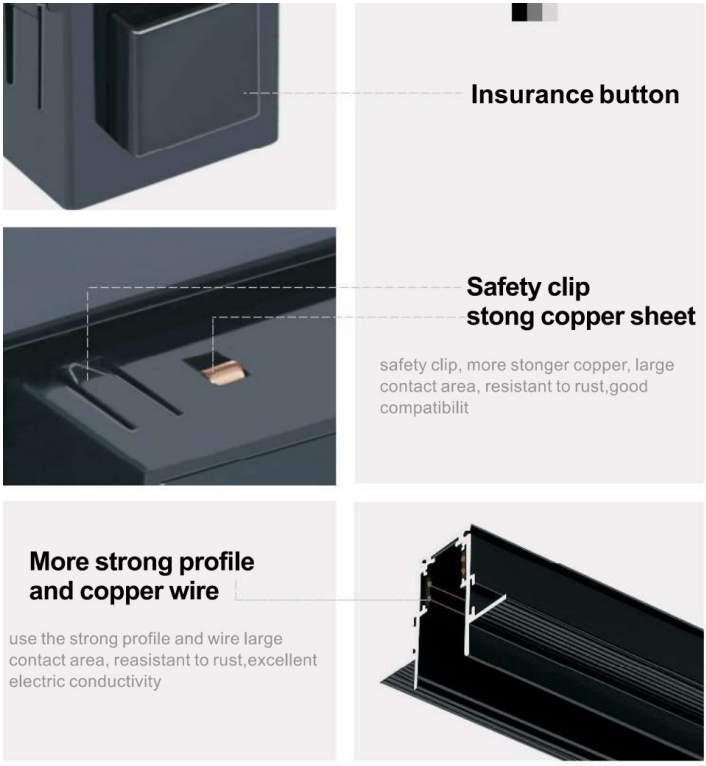


A retaining button, safety clip and copper contacts form the module connection. The source illustrates the contact area and reinforced track profile.

Four installation formats

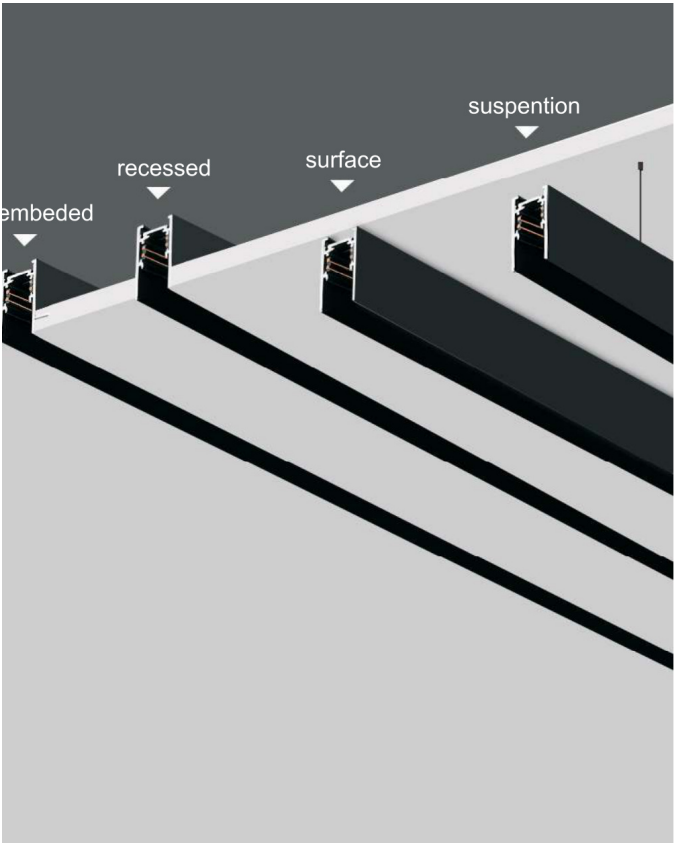

Embedded, recessed, surface-mounted and suspended formats support different architectural conditions.

Recessed integration

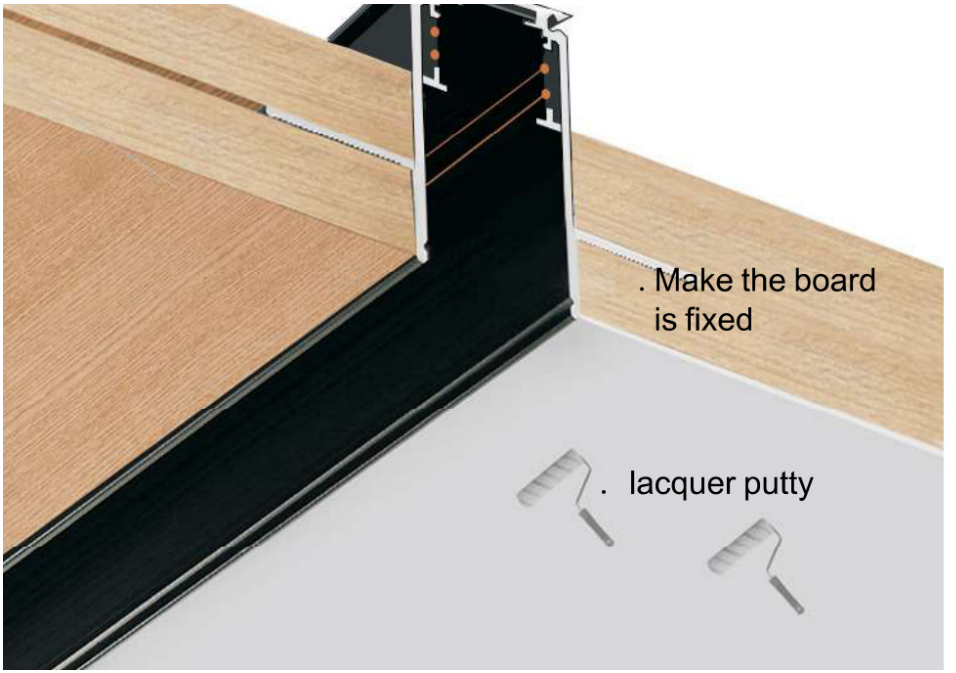


The reference calls for a 35-40 mm slot and a fixed supporting board. Secure the track to the board before completing the surrounding plaster finish.

Recessed installation





Insert the track into the opening, and then make L screw on the edge of the guide to fix the rack, and make sure it is firm

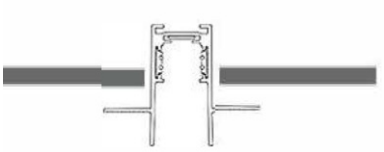



Cover the outer board at the lower end of the track rail, the height of the outer board is the same as that of the lower end of the track rail, and plaster the covering net until the gap between the outer board and the guide rail is completely covered

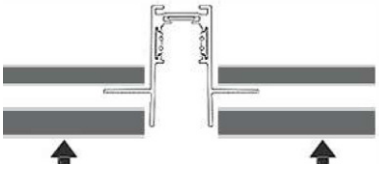

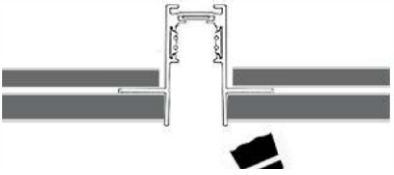

1. Prepare a 35-40 mm opening and the supporting plate; the reference specifies 50 mm ceiling space.
2. Insert and secure the track with the indicated screws.
3. Fit the outer board flush to the rail and complete the mesh and plaster finish.

Find your model

Model / Collection / Page

1005	Alloye	73
2ALGD2202C-12W	Magnetic gate lamp	100
2ALGD2202C-24W	Magnetic gate lamp	100
2ALGD2202C-36W	Magnetic gate lamp	100
2ALGD2203N-12W	Adjustable grating lamp	101
2ALGD2203N-24W	Adjustable grating lamp	101
2ALGD2203N-6W	Adjustable grating lamp	101
IL-2300/2302-A	Vectra	38
IL-2300/2302-B	Vectra	38
IL-2300/2302-C	Vectra	38
IL-2300/2302-D	Vectra	38
IL-2300/2302-E	Vectra	38
IL-2300/2302-F	Vectra	38
IL 100	Rio	87
IL 1001	Rinz	48
IL 1002	Rinz	48
IL 1003	Rinz	48
IL 1006	Lumiz Series	84
IL 1006	Lumiz Series	85
IL 1006.A	Lumiz Series	84
IL 1006.A	Lumiz Series	85
IL 1007	Lumiz Series	84
IL 1007	Lumiz Series	85
IL 1012	Aria	92
IL 1014	Threz	97

Find your model

Model / Collection / Page

IL 1015	Threz	97
IL 1016	Threz	97
IL 1017	Threz	97
IL 1018	Threz	97
IL 1019	Reya	95
IL 1019A	Aria	96
IL 1020	Reya	95
IL 1021	Reya	95
IL 1022	Reya	95
IL 1023	Aria	91
IL 1024	Aria	91
IL 1025	Aria	91
IL 1026	Aria	91
IL 1027	Aria	93
IL 1028	Aria	93
IL 1029	Aria	93
IL 1030	Aria	93
IL 1031	Jaaz	89
IL 1031	Jaaz	90
IL 1032	Jaaz	89
IL 1032	Jaaz	90
IL 1033	Jaaz	89
IL 1033	Jaaz	90
IL 1034	Jaaz	89
IL 1034	Jaaz	90

Find your model

Model / Collection / Page

IL 1042	Remo	67
IL 1060	Pull Out Light	51
IL 1061	Pull Out Light	51
IL 1062	Pull Out Light	51
IL 1063	Pull Out Light	51
IL 1066	Cane	68
IL 1068	Cane	68
IL 1070	Riyo	79
IL 1071	Riyo	79
IL 1080	Blade	74
IL 1081	Blade	74
IL 1082	Blade	74
IL 1083	Blade	74
IL 1099	Loralai	50
IL 1210	Tevin	47
IL 1212	Tevin	47
IL 1410	Lotus	34
IL 150	Rio	87
IL 1881	Belano	64
IL 19125	Hazel	24
IL 1916	Hazel	28
IL 1916	Hazel	43
IL 1917	Hazel	28
IL 1917	Hazel	43
IL 1919	Hazel	36

Find your model

Model / Collection / Page

IL 1920	Hazel	36
IL 1926	Hazel	24
IL 200	Rio	87
IL 22150	Aria	82
IL 22200	Aria	82
IL 2251	Relca	81
IL 2252	Relca	81
IL 2268	Matrix	80
IL 2269	Matrix	80
IL 2272-A	Dolce	75
IL 2272-A	Sleek	76
IL 2272-B	Dolce	75
IL 2272-B	Sleek	76
IL 2272-C	Dolce	75
IL 2278	Scherzo	49
IL 2279	Scherzo	49
IL 2282	Point	46
IL 2283	Point	46
IL 2284	Point	46
IL 2286	Vesanto	69
IL 2287	Vesanto	69
IL 2288	Vesanto	69
IL 2289	Vesanto	69
IL 2290	Vesanto	69
IL 2300	Vectra	38

Find your model

Model / Collection / Page

IL 2302	Vectra	38
IL 2310	Luchi	39
IL 2310	Luchi	44
IL 2310	Luchi	54
IL 250	Rio	87
IL 2525	Neo 25i	52
IL 300	Rio	87
IL 4025	Lumiz	66
IL 4025	Glady	72
IL 4030	Glady	72
IL 4122	Aric	94
IL 4125	Tiaggo	71
IL 5012	Belano	62
IL 5012	Belano	63
IL 5013	Belano	63
IL 5014	Belano	63
IL 75	Rio	87
IL 9020	Limo Series	98
IL 9050	Limo Series	98
IL 9100	Limo Series	98
IL 9150	Limo Series	98
IL 9225	25i	42
IL 922i	25i	42
IL 922i	25i	59
IL 923i	25i	59

Find your model

Model / Collection / Page

IL 924i	25i	41
IL 924i	25i	59
IL 925i	25i	41
IL 925i	25i	59
Track connectors / accessories	Recessed track rails	9
Track connectors / accessories	Quarter-circle rails & c	11
Track connectors / accessories	Surface track rails	13
Track connectors / accessories	Surface arcs & connector	15
Twin-wheel RGB	Rio	86
ZL0035	System components	6
ZL1010	Tevin	25
ZL 1010	Tevin	27
ZL 1010	Tevin	32
ZL 1010	Tevin	33
ZL1012	Tevin	25
ZL 1020	Tevin	27
ZL 1020	Tevin	32
ZL 1020	Tevin	33
ZL1020	Hazel	57
ZL1025	Hazel	57
ZL 1030	Tevin	27
ZL 1030	Tevin	33
ZL1030	Hazel	57
ZL1919	Tevin	23
ZL 1919	Tevin	30

Find your model

Model / Collection / Page

ZL1920	Tevin	23
ZL1992	Dulux	29
ZL1998	Tevin	45
ZL 2010	Lotus	37
ZL2012	Hazel	26
ZL 2015	Tevin	35
ZL 2015	Lotus	37
ZL 2020	Tevin	35
ZL 2020	Lotus	37
ZL2020	Luchi	55
ZL2024	Luchi	55
ZL2310	25i	40
ZL 2322	Scherzo	65
ZL 6020	Hazel	58
ZL 6030	Hazel	53
ZL 6030	Hazel	58
ZL80025	System components	6
ZL80026	System components	6
ZL80032	System components	6
ZL80032	Adjustable circular modu	20
ZL80032	Adjustable circular modu	21
ZL80035	Adjustable circular modu	20
ZL80035	Adjustable circular modu	21
ZL80066R	System components	6
ZL80081	System components	6

Find your model

Model / Collection / Page

ZL80081	ZL80081 - diffuse module	16
ZL80081	ZL80081 - diffuse module	17
ZL80082	System components	6
ZL80082	ZL80082 - grating module	18
ZL80082	ZL80082 - grating module	19
ZL80083	System components	6
ZL80125R	System components	6
ZL8020	Scherzo	56
ZL8024	Scherzo	56
ZL 9008	Verna	31
ZL 9010	Verna	31
ZL 9010	Belano	61
ZL9010	Blade	77
ZL9020	Blade	77
ZL9030	Blade	77
Ø1000	Recessed track rails	8
Ø1000	Quarter-circle rails & c	10
Ø1000	Surface track rails	12
Ø1000	Surface arcs & connector	14
Ø1200	Recessed track rails	8
Ø1200	Quarter-circle rails & c	10
Ø1200	Surface track rails	12
Ø1200	Surface arcs & connector	14
Ø1500	Recessed track rails	8
Ø1500	Quarter-circle rails & c	10

Find your model

Model / Collection / Page

Ø1500	Surface track rails	12
Ø1500	Surface arcs & connector	14
Ø600	Recessed track rails	8
Ø600	Quarter-circle rails & c	10
Ø600	Surface track rails	12
Ø600	Surface arcs & connector	14
Ø800	Recessed track rails	8
Ø800	Quarter-circle rails & c	10
Ø800	Surface track rails	12
Ø800	Surface arcs & connector	14

LUXMORE

Light for every space.

Architectural lighting. Thoughtful detail.
A collection for interiors and beyond.

luxmore.ae

LIGHTING / AV / AUTOMATION